

CS-R28

2U Rackmount Chassis




Features

- Support E-ATX motherboard
- 8x3.5" swappable HDD bays and 1xSlim-ODD Bays (Reserved) + 2 x 2.5" Internal HDD bays
- Supports 2U Single/Redundant Power Supply

Specifications

M/B Form Factor	Support up to E-ATX(12"x13") motherboard
Dimension (W x D x H)	438.8mm x 652.4mm x 88mm (17.35" x 25.68" x 3.5")
Color	Black
Processor Support	-
Drive Bay	8 x 3.5" HDD swappable bays, 2 x 2.5" Internal HDD bays
Peripheral Bay	Support Slim ODD (optional)
Backplane	Support SAS/SATA 6Gb/s to SATA 6Gb/s backplane (optional)
Expansion Slot	2 x USB3.0
System Cooling	3 x 80mm PWM fan
Front I/O	-
Back I/O	-
Button	1 x Power Button
LED	1 x Power LED 1 x HDD activity LED 2 x Network LED 1 x System overheat LED
Security	-
Power Supply	Support Standard 2U Single/Redundant Power Supply
Environment	Operating Temperature: 10° ~ 35°C (32° ~ 104°F) Storage Temperature: -40° ~ 70°C (-40° ~ 176°F) Operating Humidity: 8% ~ 90% RH (non-condensing) Storage Humidity: 5% ~ 95% RH (non-condensing)
Slide Rail	Support 1U Tool-less Slide Rail

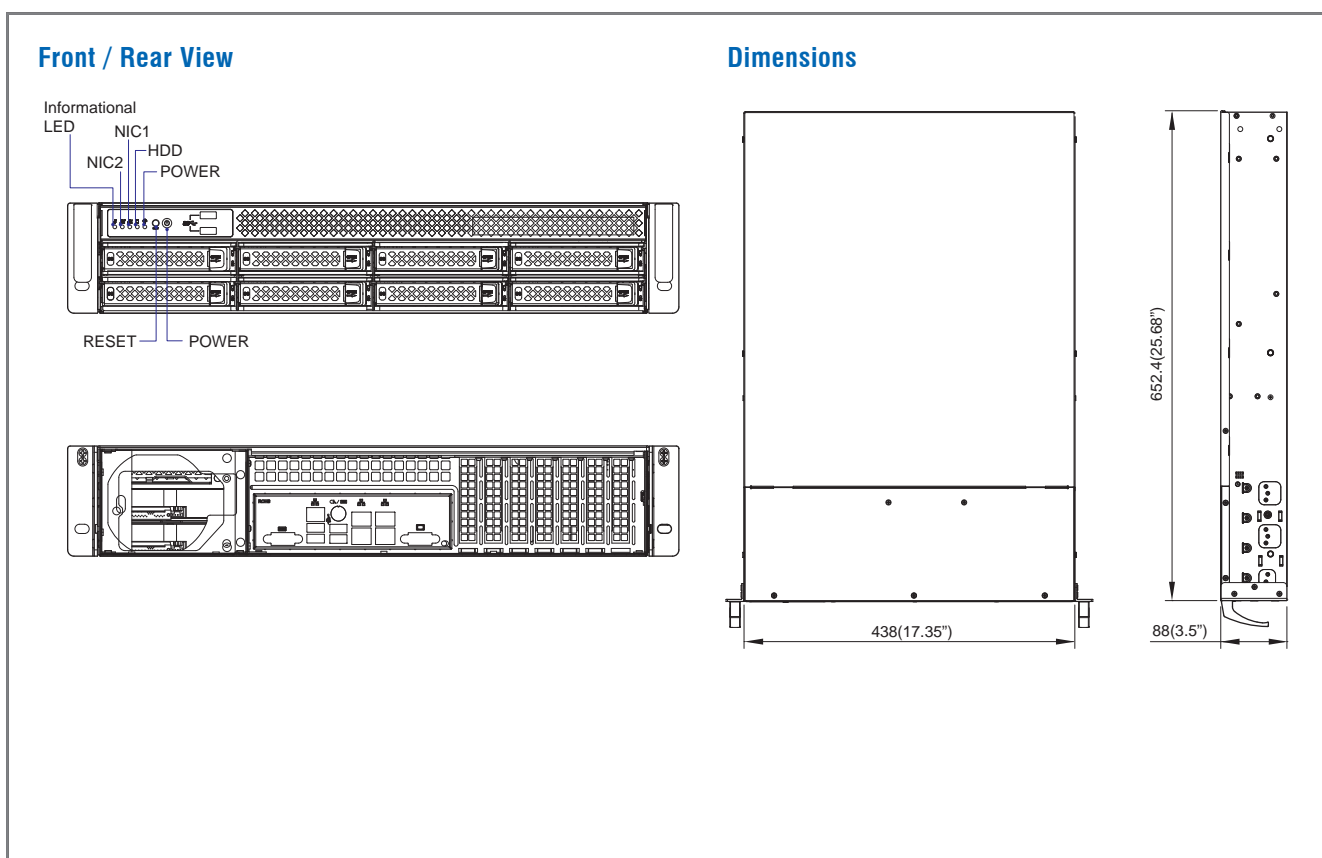

Packing List

--

Optional Parts

Description	Part Number

Order Information

SKU	Description	HDD Tray	Backplane	Front I/O	Power Supply
CS-R28-01P	2U Rackmount Chassis	8×3.5" swappable	N/A	N/A	N/A
CS-R28-02P	2U Rackmount Chassis	8×3.5" swappable	SAS/SATA 6Gb/s to SATA 6Gb/s backplane	N/A	650W 2U Single Power Supply
CS-R28-03P	2U Rackmount Chassis	8×3.5" swappable	SAS/SATA 6Gb/s to SATA 6Gb/s backplane	N/A	750W 2U Redundant Power Supply